
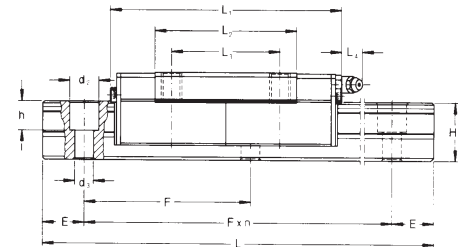



H-TA/TB-tyypit



H-TA/TB

Malli	mm			mm							Voitelu- nippa		
	H	H ₁	N	W ₁	W ₂	W ₃	W ₅	L ₁	L ₂	L ₃		H ₃	M ₁ X I
H 15TA	24	4,6	16	47	38	4,5	46,5	71	30	0	7	M 5 X 7	NAS 516-A
H 15TB							60					4,5 X 7	
H 20TA	30	5	21,5	63	53	5	60	91	40	0	8	M 6 X 10	NAS 516-1A
H 20TB							79					6 X 10	
H 25TA	36	6,5	23,5	70	57	6,5	66	97	45	10	10	M 8 X 12	B-M6F
H 25TB							89					7 X 12	
H 30TA	42	7	31	90	72	9	81	111	52	10	11	M 10 X 14	B-M6F
H 30TB							112					9 X 14	
H 35TA	48	8	33	100	82	9	92	128	62	10	13	M 10 X 16	B M6F
H 35TB							123					9 X 16	
H 45TA	60	11	37,5	120	100	10	112	158	80	12	15	M 12 X 19	B-PT 1/8
H 45TB							147					11 X 19	
H 55TA	70	14	43,5	140	116	12	130	189	95	12	17	M 14 X 23	B-PT1/8
H 55TB							171					14 X 23	
H 65TA	85	14	53,5	170	142	14	162	225	110	12	20	M 16 X 29	B-PT1/8
H 65TB							207					16 X 29	

Malli	mm								Kuorm. N		Sall. momentit, Nm			Laakeri	Kisko
	W	W4	H4	d2	d3	h	E	F	C	C0	MA	MB	MC	kg	kg/m
H 15TA/TB	15	7.5	17	7.5	4.5	7	30	60	7900	11600	70	70	110	0.2	1.7
H 20TA/TB	20	10	21	9.5	6	11	30	60	14300	20900	190	190	260	0.4	2.8
H 25TA/TB	23	11.5	24	11	7	11	30	60	19000	26100	240	240	380	0.6	3.7
H 30TA/TB	28	14	28	14	9	14	20	80	26700	35400	390	390	610	1.0	5.3
H 35TA/TB	34	17	32	14	9	15	20	80	36000	46300	580	580	960	1.5	7.5
H 45TA/TB	45	22.5	42	20	14	21	30	105	58700	72400	1130	1130	1960	2.7	12.9
H 55TA/TB	53	26.5	48	23	16	24	60	120	91300	112200	2240	2240	3570	4.4	17.3
H 65TA/TB	63	31.5	58	26	18	25	35	150	139000	162800	3780	3780	6290	8.4	24.9

